



SKROSS®
ADAPT TO THE WORLD

EDITION AUTUMN 2017

Safe + Simple + Swiss

SKROSS® products are available in more than 100 countries around the world, where SKROSS® is successfully positioned as a leading brand for high-quality travel accessories. Our range of products includes the world famous and unique SKROSS® world travel adapters, a complete range of USB chargers for car and home, power banks and charge & sync cables for today's modern traveller.

Safe products

At SKROSS®, safety is always at the centre of the entire development and production process. The standards defined by the International Electrotechnical Commission (IEC) form the foundation for our development team to design innovative gadgets that give you access to power anywhere in the world.

Simple charging – any time

With SKROSS®, staying fully charged is simple – anywhere around the globe, on all continents. Our patented country slider system ensures connection all over the world. At the same time, our products remain the most compact and easy to use on the market. That is what makes SKROSS® unique.

Swiss mobile power innovations

Every SKROSS® product is designed with a clear focus to make sophisticated traveller's life easier. In particular, all genuine SKROSS® world adapters are designed and developed in Switzerland in order to meet the very highest Swiss quality standards.

SKROSS® – a global player from Switzerland



World Travel Adapters (earthed)



PRO

Article-No. 1.103141


For travellers from Europe (Schuko & 2-pole Euro) to more than 120 countries



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 6.3 A
- Power rating: e.g. at 100 V – 630 W / 250 V – 1575 W
- Replaceable fuse
- Suitable for devices with 2- & 3-pole plugs
- Adapter does not convert voltage

Compatibility (on the socket side; 3-pole)

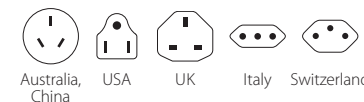

PRO – World

Article-No. 1.103175


For travellers from all over the world to more than 205 countries



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 6.3 A
- Power rating: e.g. at 100 V – 630 W / 250 V – 1575 W
- Replaceable fuse
- Suitable for devices with 2- & 3-pole plugs
- Adapter does not convert voltage

Compatibility (on the socket side; 3-pole)

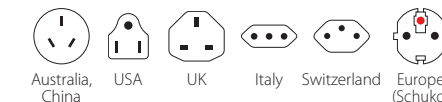

PRO – World & USB

Article-No. 1.302535


For travellers from all over the world to more than 205 countries; one integrated USB port



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 6.3 A
- Power rating: e.g. at 100 V – 630 W / 250 V – 1575 W
- Suitable for devices with 2- & 3-pole plugs
- USB output: 5 V / 2.1 A
- Adapter does not convert voltage

Compatibility (on the socket side; 3-pole)

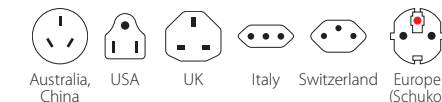

World Travel Adapters (earthed)



PRO Light

Article-No. 1.103150

For travellers from Europe (Schuko & 2-pole Euro) to more than 100 countries



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 6.3 A
- Power rating: e.g. at 100 V – 630 W / 250 V – 1575 W
- Integrated fuse
- Suitable for devices with 2- & 3-pole plugs
- Adapter does not convert voltage

Compatibility (on the socket side; 3-pole)



Australia, China USA UK



PRO Light – World

Article-No. 1.103160

For travellers from all over the world to more than 200 countries



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 6.3 A
- Power rating: e.g. at 100 V – 630 W / 250 V – 1575 W
- Integrated fuse
- Suitable for devices with 2- & 3-pole plugs
- Adapter does not convert voltage

Compatibility (on the socket side; 3-pole)



Australia, China USA UK Europe (Schuko)

World Travel Adapters (earthed)



PRO Light USB

Article-No. 1.302540

For travellers from Europe (Schuko & 2-pole Euro) to more than 100 countries; with integrated dual USB charger



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 6.3 A
- Power rating: e.g. at 100 V – 630 W / 250 V – 1575 W
- Integrated fuse
- Suitable for devices with 2- & 3-pole plugs
- 2 x USB output: 5 V / 2.4 A shared
- Adapter does not convert voltage

Compatibility (on the socket side; 3-pole)



Australia, China USA UK



PRO Light USB – World

Article-No. 1.302550

For travellers from all over the world to more than 200 countries; with integrated dual USB charger



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 6.3 A
- Power rating: e.g. at 100 V – 630 W / 250 V – 1575 W
- Integrated fuse
- Suitable for devices with 2- & 3-pole plugs
- 2 x USB output: 5 V / 2.4 A shared
- Adapter does not convert voltage

Compatibility (on the socket side; 3-pole)



Australia, China USA UK Europe (Schuko)

World Travel Adapters (unearthed)




MUV USB
Article-No. 1.302930
For travellers from all over the world to more than 220 countries; with integrated dual USB charger



- Specifications**
- Input voltage: 100 V – 250 V
 - Max. load: 2.5 A
 - Power rating: e.g. at 100 V – 250 W / 250 V – 625 W
 - Replaceable fuse
 - Suitable for devices with 2-pole plugs
 - 2 x USB output: 5 V / 2.4 A shared
 - Adapter does not convert voltage

Compatibility (on the socket side; 2-pole)



Power Pack
Article-No. 1.302170
The SKROSS® MUV USB world adapter is equipped with a convenient back-up power source



- Specifications**
- MUV USB: see left
SOS Battery:
- Output: 5 V / 1 A max. (2.1 A throughput)
 - Input: 5 V / 2 A max.
 - Capacity: 1200 mA / 4.44 Wh
 - 3.7 V LiPo Battery, class A
 - Number of charge cycles: min. 300

Compatibility (on the socket side; 2-pole)



World Travel Adapters (unearthed)




MUV Micro
Article-No. 1.302180
For travellers from all over the world to more than 220 countries; outstandingly compact



- Specifications**
- Input voltage: 100 V – 250 V
 - Max. load: 2.5 A
 - Power rating: e.g. at 100 V – 250 W / 250 V – 625 W
 - Replaceable fuse
 - Suitable for devices with 2-pole plugs
 - Adapter does not convert voltage

Compatibility (on the socket side; 2-pole)




MUV Micro USB
Article-No. 1.302830
For travellers from all over the world to more than 220 countries; includes the UK USB Charger



- Specifications**
- Input voltage: 100 V – 250 V
 - Max. load: 2.5 A
 - Power rating: e.g. at 100 V – 250 W / 250 V – 625 W
 - Replaceable fuse
 - Suitable for devices with 2-pole plugs
 - 2 x USB output: 5 V / 2.4 A shared
 - Adapter does not convert voltage

Compatibility (on the socket side; 2-pole)



World Travel Adapters (unearthed)



EVO

Article-No. 1.102100

For travellers from all over the world to more than 220 countries



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 2.5 A
- Power rating: e.g. at 100 V – 250 W / 250 V – 625 W
- Replaceable fuse; 2 spare fuses included
- Suitable for devices with 2-pole plugs
- Adapter does not convert voltage

Compatibility (on the socket side; 2-pole)



Australia, China USA, Japan UK Euro



2X
USB
2.4 A max.



EVO USB

Article-No. 1.302132

For travellers from all over the world to more than 220 countries; includes the US USB Charger



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 2.5 A
- Power rating: e.g. at 100 V – 250 W / 250 V – 625 W
- Replaceable fuse; 2 spare fuses included
- Suitable for devices with 2-pole plugs
- 2 x USB output: 5 V / 2.4 A shared
- Adapter does not convert voltage

Compatibility (on the socket side; 2-pole)



Australia, China USA, Japan UK Euro

World Travel Adapters (unearthed)

specific
markets
only



Classic

Article-No. 1.100160


For travellers from all over the world to more than 220 countries



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 2.5 A
- Power rating: e.g. at 100 V – 250 W / 250 V – 625 W
- Replaceable fuse
- Suitable for devices with 2-pole plugs
- Adapter does not convert voltage

Compatibility (on the socket side; 2-pole)



Australia, China USA, Japan UK Euro

specific
markets
only



1X
USB
1.0 A max.

Classic USB

Article-No. 1.300120

For travellers from all over the world to more than 220 countries; includes a USB charger top



Specifications

- Input voltage: 100 V – 250 V
- Max. load: 2.5 A
- Power rating: e.g. at 100 V – 250 W / 250 V – 625 W
- Replaceable fuse
- Suitable for devices with 2-pole plugs
- USB output: 5 V / 1 A
- Adapter does not convert voltage

Compatibility (on the socket side; 2-pole)



Australia, China USA, Japan UK Euro

Country Travel Adapters (earthed)

 **WORLD TO** a specific country – from more than 220 countries

 **World to Australia/China**
Article-No. 1.500222



 **World to Italy**
Article-No. 1.500223



 **World to UK**
Article-No. 1.500220



 **World to USA**
Article-No. 1.500221



 **India-Israel-Denmark to Europe**
Article-No. 1.500217




 **World to Europe**
Article-No. 1.500211



 **World to South Africa**
Article-No. 1.500224



Compatibility (on the top side)



 **EUROPE TO** a specific country

 **Europe to Australia/China**
Article-No. 1.500209



 **Europe to Italy**
Article-No. 1.500212



 **Europe to UK**
Article-No. 1.500230



 **Europe to USA**
Article-No. 1.500203



 **Europe to Switzerland**
Article-No. 1.500205



Compatibility (on the top side)



Country Travel Adapters (earthed)

COMBO – WORLD TO a specific country & Europe

 **Combo – World to Australia/China**
Article-No. 1.500210



 **Combo – World to Italy**
Article-No. 1.500213



 **Combo – World to UK**
Article-No. 1.500231



 **Combo – World to USA**
Article-No. 1.500204



 **Combo – World to Switzerland**
Article-No. 1.500206



 **Combo – World to India**
Article-No. 1.500215



 **Combo – World to Israel**
Article-No. 1.500216



 **Combo – World to Denmark**
Article-No. 1.500214



 **Combo – World to South Africa**
Article-No. 1.500202



Compatibility (on the top side)



Specifications: Input voltage and power rating depending on the version. Does not convert voltage.

Country Travel Adapters (earthed) with USB



World to Europe USB

Article-No. 1.500260


Safe connection for all devices in countries with European (Schuko) standard sockets



Specifications

- Suitable for 2- & 3-pole plugs & USB devices
- USB output: 5 V / 2.1 A
- Input voltage: 100 V – 250 V
- Max. load: 16 A
- European (Schuko) standard sockets
- Adapter does not convert voltage

Compatibility (top side)

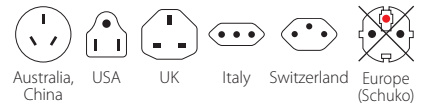

World to UK USB

Article-No. 1.500261


Safe connection for all devices in countries with UK standard sockets



Specifications

- Suitable for 2- & 3-pole plugs & USB devices
- USB output: 5 V / 2.1 A
- Input voltage: 100 V – 250 V
- Max. load: 13 A
- Replaceable fuse
- UK standard sockets
- Adapter does not convert voltage

Compatibility (top side)

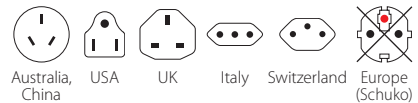

World to USA USB

Article-No. 1.500262


Safe connection for all devices in countries with US standard sockets



Specifications

- Suitable for 2- & 3-pole plugs & USB devices
- USB output: 5 V / 2.1 A
- Input voltage: 100 V – 250 V
- Max. load: 15 A
- US standard sockets
- Adapter does not convert voltage

Compatibility (top side)

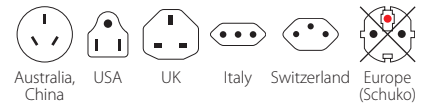

USB Chargers



World USB Charger

Article-No. 1.302320


Powerful dual USB charger useable in over 220 countries



Specifications

- Suitable for USB devices
- Input voltage: 100 V – 250 V
- 2 x USB output: 5 V / 2.4 A shared

Compatibility (socket side)

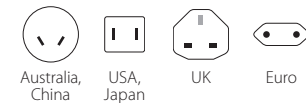

UK USB Charger

Article-No. 1.302720


Dual USB charger for all countries with UK standard sockets



Specifications

- UK standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 250 V
- 2 x USB output: 5 V / 2.4 A shared
- Compatible with all SKROSS® world adapters with UK input

Compatibility (socket side)



US USB Charger

Article-No. 1.302730

Dual USB charger for all countries with US standard sockets



Specifications

- US standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 250 V
- 2 x USB output: 5 V / 2.4 A shared
- Compatible with all SKROSS® world adapters with US input

Compatibility (socket side)



Euro USB Charger

Article-No. 1.302420

Dual USB charger for all countries with Euro standard sockets



Specifications

- Euro standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 250 V
- 2 x USB output: 5 V / 2.4 A shared
- Compatible with all SKROSS® adapters

Compatibility (socket side)



USB Chargers



Euro USB Charger – 2-Port

Article-No. 2.800111

For convenient use in all countries that feature Euro standard sockets



Specifications

- Euro standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 240 V
- 2 x USB Output: 5 V / 3.4 A max. in total
- Smart IC: automatically sets the optimal charging current

Compatibility (socket side)



Euro



UK USB Charger – 2-Port

Article-No. 2.800112

For convenient use in all countries that feature UK standard sockets



Specifications

- UK standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 240 V
- 2 x USB Output: 5 V / 3.4 A max. in total
- Smart IC: automatically sets the optimal charging current

Compatibility (socket side)



UK



US USB Charger – 2-Port

Article-No. 2.800110

For convenient use in all countries that feature US standard sockets



Specifications

- USA/Japan standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 240 V
- 2 x USB Output: 5 V / 3.4 A max. in total
- Smart IC: automatically sets the optimal charging current

Compatibility (socket side)



USA,
Japan

USB Chargers



Euro USB Charger – 4-Port

Article-No. 2.800101

Energises 4 USB devices at the same time in all countries with Euro standard sockets



Specifications

- Euro standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 240 V
- 4 x USB Output: 5 V / 4.8 A max. in total

Compatibility (socket side)



Euro



UK USB Charger – 4-Port

Article-No. 2.800102

Energises 4 USB devices at the same time in all countries with UK standard sockets



Specifications

- UK standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 240 V
- 4 x USB Output: 5 V / 4.8 A max. in total

Compatibility (socket side)



UK



US USB Charger – 4-Port

Article-No. 2.800100

Energises 4 USB devices at the same time in all countries with US standard sockets



Specifications

- USA/Japan standard sockets
- Suitable for USB devices
- Input voltage: 100 V – 240 V
- 4 x USB Output: 5 V / 4.8 A max. in total

Compatibility (socket side)



USA,
Japan

Power Banks – Basics



SKROSS® RELOAD 4

Article-No. 1.400100-E

Perfect when you need an energy boost on the go – charges your smartphone more than once



Specifications

- Output: 5 V / 1 A max.
- Input: 5 V / 1 A max.
- Capacity: 4000 mAh / 14.80 Wh
- 3.7 V lithium battery
- Power status: LED
- Micro USB cable included



SKROSS® RELOAD 6

Article-No. 1.400101-E

Perfect when you need an energy boost on the go – charges your smartphone around twice



Specifications

- Output: 5 V / 1 A max.
- Input: 5 V / 1 A max.
- Capacity: 6000 mAh / 22.20 Wh
- 3.7 V lithium battery
- Power status: LED
- Micro USB cable included

Power Banks – Performance Line



SKROSS® RELOAD 3

Article-No. 1.400110

Perfect when you need an energy boost on the go – charges your smartphone once



Specifications

- Output: 5 V / 2 A max.
- Input: 5 V / 2 A max.
- Capacity: 3500 mAh / 12.95 Wh
- 3.7 V lithium battery
- Power status: LED
- Micro USB cable included



SKROSS® RELOAD 5^{HP}

Article-No. 1.302169

Perfect when you need an energy boost on the go – charges your smartphone around twice



Specifications

- Output 1: 5 V / 1 A max.
- Output 2: 5 V / 2.1 A max.
- Input: 5 V / 2 A max.
- Capacity: 5000 mAh / 18.50 Wh
- 3.7 V lithium battery
- Power status: LED
- Micro USB cable included



SKROSS® RELOAD 7

Article-No. 1.400103


Perfect when you need an energy boost on the go – charges your smartphone more than twice



Specifications

- Output 1: 5 V / 2.4 A max.
- Output 2: 5 V / 2.4 A max.
- Max. output: 4.2 A
- Input: 5 V / 2 A max.
- Capacity: 7000 mAh / 25.90 Wh
- 3.7 V lithium battery
- Power status: LED
- Micro USB cable included

USB Cables – Basics

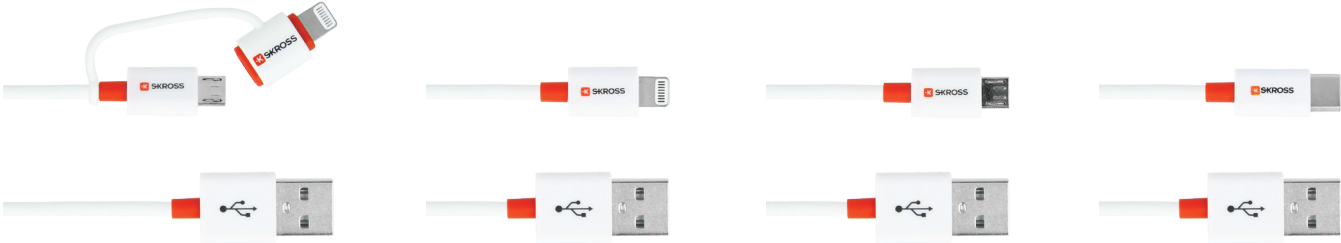

2in1 Charge'n Sync Micro USB & Lightning Connector

Article-No. 2.700200-E

For all USB devices using Micro USB or Lightning Connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple

Charge'n Sync Lightning Connector

Article-No. 2.700205-E

For all USB devices using Lightning Connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple

Charge'n Sync Micro USB

Article-No. 2.700202-E

For all USB devices using Micro USB connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V

Charge'n Sync USB Type-C (2.0)

Article-No. 2.700206-E


For all USB devices using USB Type-C connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- USB-standard: 2.0

USB Cables – Steel Line

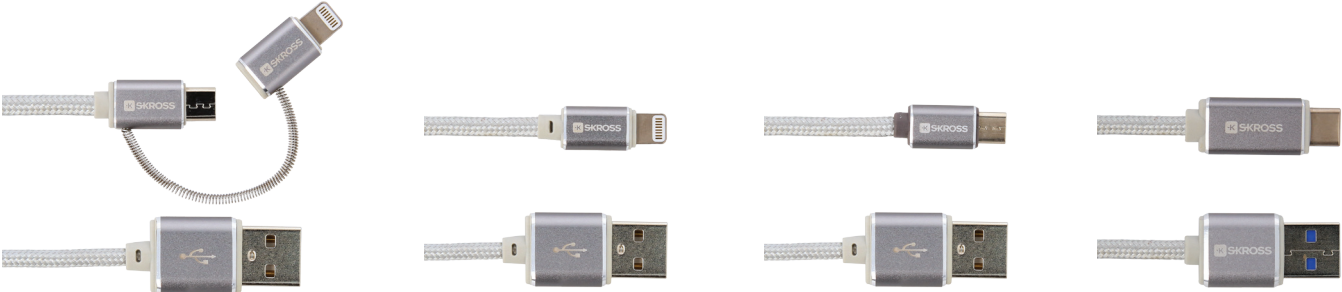

2in1 Charge'n Sync Micro USB & Lightning Connector

Article-No. 2.700241

The smartest cable to charge USB devices using Micro USB or Lightning Connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple

Charge'n Sync Lightning Connector

Article-No. 2.700242

The smartest cable to charge USB devices using Lightning Connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple

Charge'n Sync Micro USB

Article-No. 2.700240

The smartest cable to charge USB devices using Micro USB connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V

Charge'n Sync USB Type-C (3.0)

Article-No. 2.700243


The smartest cable to charge USB devices using USB Type-C connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- USB-standard: 3.0

USB Cables – Steel Line (Special Edition)

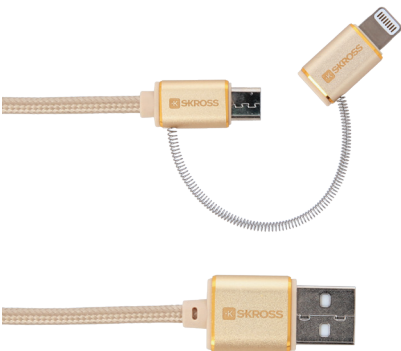

2in1 Charge'n Sync Micro USB & Lightning Connector (Gold)

Article-No. 2.700250

The smartest cable to charge USB devices using Micro USB or Lightning Connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple



2in1 Charge'n Sync Micro USB & Lightning Connector (Rose Gold)

Article-No. 2.700251

The smartest cable to charge USB devices using Micro USB or Lightning Connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple



2in1 Charge'n Sync Micro USB & Lightning Connector (Red)

Article-No. 2.700260


The smartest cable to charge USB devices using Micro USB or Lightning Connector



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple

USB Cables – Alarm Cable

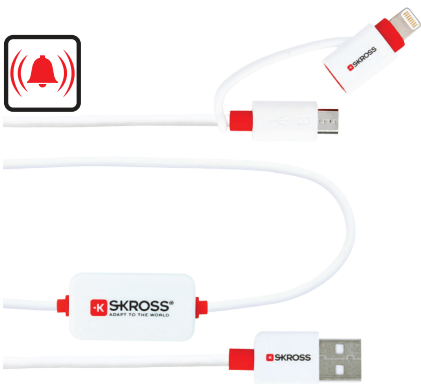

BUZZ – Alarm Cable 2in1 Micro USB & Lightning Connector

Article-No. 2.700212

Charge and sync alarm cable: theft protection and reminder function – buzzes if connection is broken



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple



BUZZ – Alarm Cable 2in1 Micro USB & Lightning Connector

Article-No. 2.700211

Charge and sync alarm cable: theft protection and reminder function – buzzes if connection is broken



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V
- Fully certified by Apple



BUZZ – Alarm Cable 2in1 Micro USB & Lightning Connector

Article-No. 2.700210

Charge and sync alarm cable: theft protection and reminder function – buzzes if connection is broken



Specifications

- Cable length: 1 m
- Input voltage: 5 V
- Output voltage: 5 V

USB Car Chargers



Dual USB Car Charger

Article-No. 2.900610-E

Charges two devices at the same time



Specifications

- Suitable for USB devices
- Input voltage: 10 – 24 V DC
- USB output: 5 V / max. 3.4 A
- Output 1: 1 A
- Output 2: 2.4 A

Dual USB Car Charger – Quick Charge 3.0

Article-No. 2.900615

Less time charging - more time doing (up to 4x faster)



Specifications

- Suitable for USB devices
- Input voltage: 10 – 24 V DC
- USB output: 5 V / max. 5.4 A
- Output 1: 2.4 A
- Quick Charge: DC 6.5 V / 3 A, DC 9 V / 2 A, DC 12 V / 1.5 A

USB Car Charger & Lightning Connector

Article-No. 2.900616

Perfect for all iOS devices. Fully certified by Apple



Specifications

- Suitable for USB devices
- Input voltage: 10 – 24 V DC
- USB output: 5 V / max. 3.4 A
- USB output: 1 A
- Lightning Connector cable: 2.4 A

USB Car Charger & Micro USB

Article-No. 2.900617

Perfectly suited for all kinds of USB powered devices



Specifications

- Suitable for USB devices
- Input voltage: 10 – 24 V DC
- USB output: 5 V / max. 3 A
- USB output: 1 A
- Micro USB cable: 2 A

USB Car Charger & USB Type-C (2.0)

Article-No. 2.900618

Ideal for the latest devices with Type-C port



Specifications

- Suitable for USB devices
- Input voltage: 10 – 24 V DC
- USB output: 5 V / max. 5.4 A
- USB output: 2.4 A
- USB Type-C: 3 A
- USB-standard: 2.0

Accessories



Power Case

Article-No. 9.200000

The practical Power Case keeps all your travel companions perfectly organised; no products included

Suitable for

- SKROSS® travel adapters
- SKROSS® USB chargers
- SKROSS® batteries
- SKROSS® cables
- other travel accessories

WorldConnect AG
Werkstrasse 12a
9444 Diepoldsau
Switzerland

T +41 717379760
info@skross.com
 /SKROSSpower



SKROSS.COM